

MMS160.16


Power Rectifier bridge

Features:







- International standard package
- Low forward voltage drop
- Isolation voltage 2500V ~
- Simple mounting
- UL recognized, file no. E312789

Typical applications:

- DC power suppliers for apparatus device
- Input rectifying power supply for PWM converters
- Inverter welders
- Battery chargers

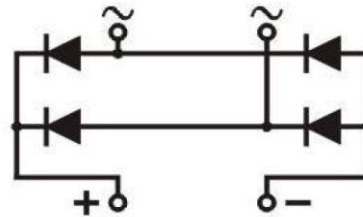

Symbol	Characteristics	Test Conditions	Value			Unit
			Min	Typ	Max	
$V_{RSM/DSM}$	Non-repetitive reverse/forward blocking voltage	$T_j = 25^{\circ}\text{C}$			1700	V
$V_{RRM/DRM}$	Repetitive reverse/forward blocking voltage	$T_j = 25^{\circ}\text{C}$			1600	V
I_D	Rectifier bridge output current	Three-phase whole wave rectifying circuit, $T_c = 100^{\circ}\text{C}$			160	A
I_{RRM}	Repetitive peak reverse current	at V_{RRM} $T_j = 150^{\circ}\text{C}$			8	mA
I_{FSM}	Forward surge current	10ms half sine wave, $T_j = 150^{\circ}\text{C}$			2200	A
$I^2 t$	$I^2 t$ for fusing coordination	$V_R = 0.6 V_{RRM}$, $T_j = 150^{\circ}\text{C}$			24200	A^2s
V_{FO}	Threshold voltage	$T_j = 150^{\circ}\text{C}$			0.85	V
r_T	Forward slope resistance	$T_j = 150^{\circ}\text{C}$			3	$\text{m}\Omega$
V_{FM}	Peak forward voltage	$T = 25^{\circ}\text{C}$; $I_T = 240\text{A}$		1.00	1.20	V
$R_{th(j-c)}$	Thermal resistance junction to case	per module			0.27	$^{\circ}\text{C/W}$
$R_{th(c-s)}$	Thermal resistance case to sink	per module			0.03	$^{\circ}\text{C/W}$
V_{ISO}	Isolation voltage	50Hz, RMS, $t = 1\text{min}$			2500	V
F_M	Mounting torque - copper plate (M6)		4		6	N·m
	Mounting torque - terminal (M6)		4		6	N·m
T_{stg}	Storage Temperature		-40		150	$^{\circ}\text{C}$
T_j	Operating Temperature		-40		150	$^{\circ}\text{C}$
W_t	Weight			320		g
Outline	M23					

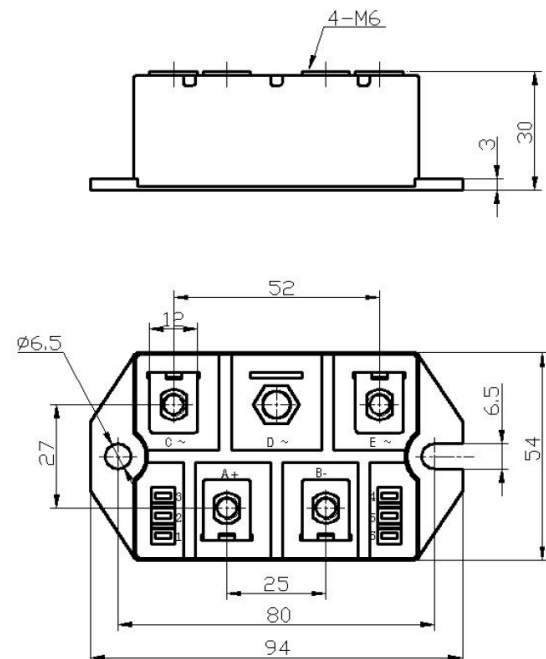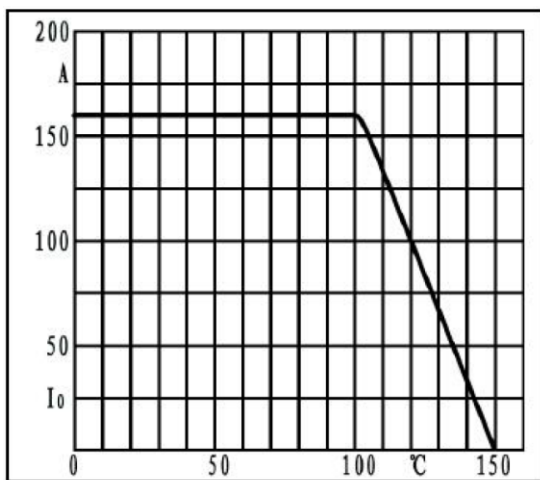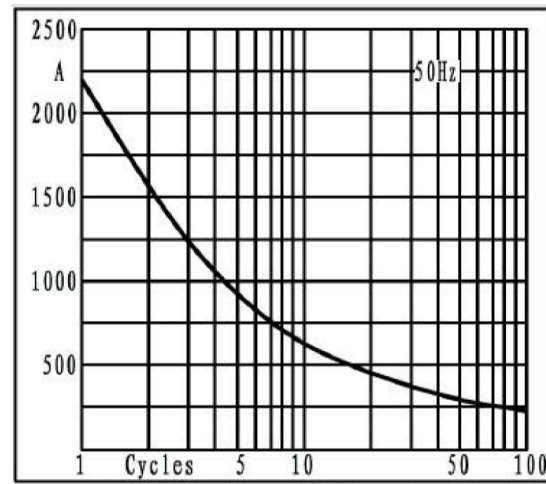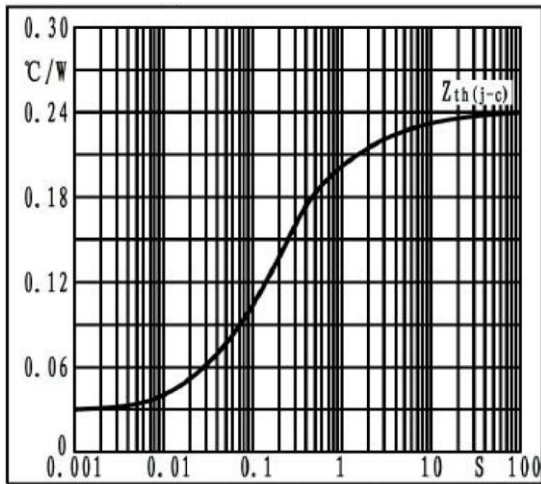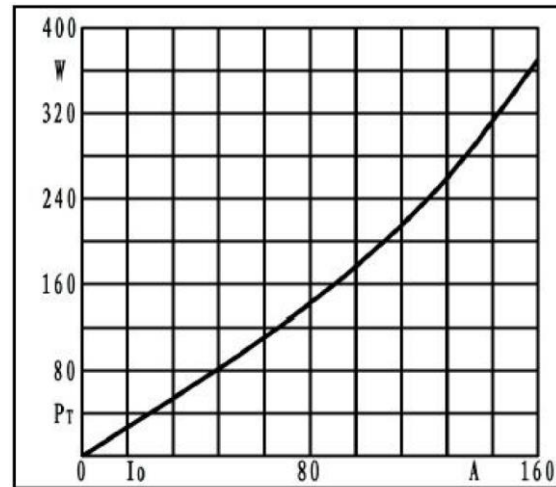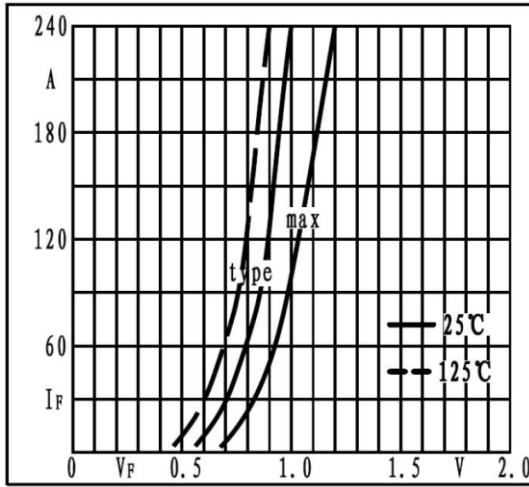

S.CO.M.E.S. Srl

Via Enrico Mattei, 6/8 - 26283 - Castiglione d'Adda (LO) - Italy

Phone: +39 0377 901243 Fax: +39 0377 900206

Scomes Srl reserves the right to change any specification without notice