

MRS120.18

Diodes module


Features:

- International standard package
- Low forward voltage drop
- Isolation voltage 3000V ~
- Simple mounting
- UL recognized, file no. E312789

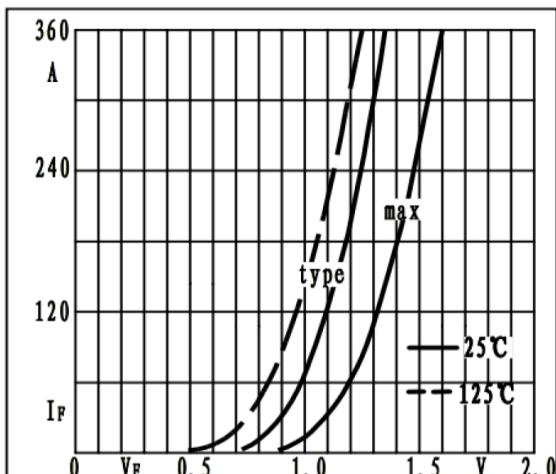
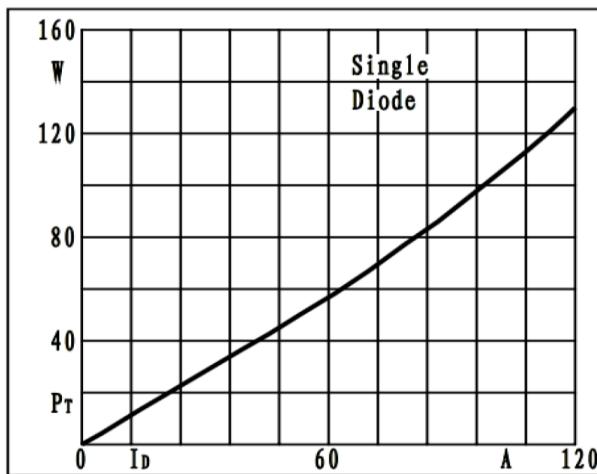
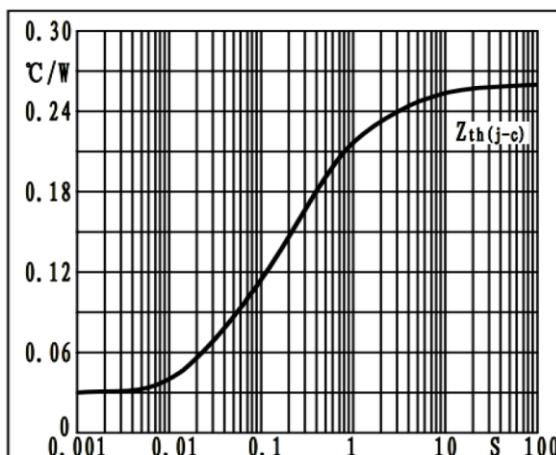
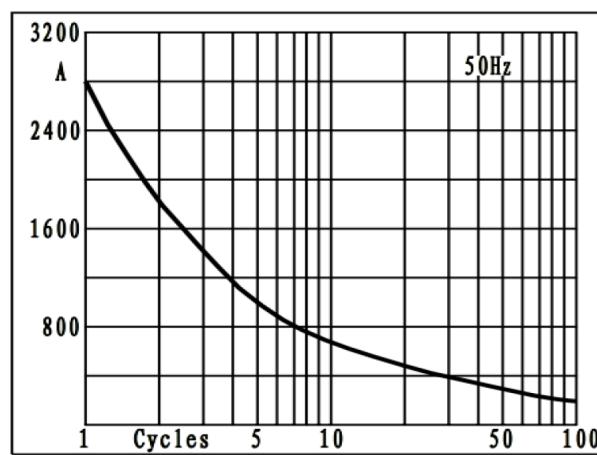
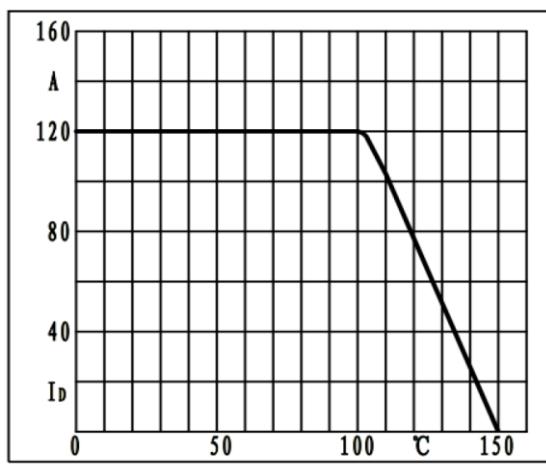
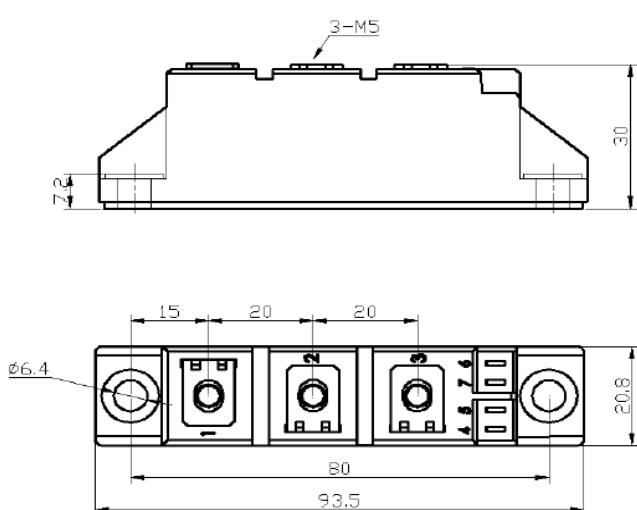


Typical applications:

- Various rectifier power
- AC/DC motor control
- Heater control
- Frequency converters



| Symbol | Characteristics | Test Conditions | Value | | | Unit |
|------------------------|---|---|-------|-----|-------|--------------|
| | | | Min | Typ | Max | |
| $V_{RSM/DSM}$ | Non-repetitive reverse/forward blocking voltage | $T_j = 25^\circ C$ | | | 1900 | V |
| $V_{RRM/DRM}$ | Repetitive reverse/forward blocking voltage | $T_j = 25^\circ C$ | | | 1800 | V |
| $I_{F(AV)}$ | Forward average current | 180° half sine wave 50Hz $T_c = 100^\circ C$ | | | 120 | A |
| $I_{F(RMS)}$ | Forward square root current | 180° half sine wave 50Hz $T_c = 100^\circ C$ | | | 172 | A |
| I_{RRM} I_{DRM} | Repetitive peak current | at V_{DRM}/V_{RRM} $T_j = 150^\circ C$ | | | 5 | mA |
| I_{FSM} | Forward surge current | 10ms half sine wave, $T_j = 45^\circ C$ | | | 2800 | A |
| I^2t | I^2t for fusing coordination | $V_R = 0.6 V_{RRM}$, $T_j = 45^\circ C$ | | | 39200 | A^2s |
| V_{FO} | Threshold voltage | $T_j = 150^\circ C$ | | | 0.83 | V |
| r_T | Forward slope resistance | $T_j = 150^\circ C$ | | | 1.80 | $m\Omega$ |
| V_{FM} | Peak forward voltage | $T=25^\circ C$; $I_T=360A$ | | | 1.60 | V |
| $R_{th(j-c)}$ | Thermal resistance junction to case | Single side cooled per chip | | | 0.26 | $^\circ C/W$ |
| $R_{th(c-s)}$ | Thermal resistance case to sink | Single side cooled per chip | | | 0.20 | $^\circ C/W$ |
| V_{ISO} | Isolation voltage | 50Hz, RMS, $t = 1min$ | | | 3000 | V |
| F_M | Mounting torque - copper plate (M6) | | 4 | | 6 | $N\cdot m$ |
| | Mounting torque - terminal (M5) | | 2.5 | | 4.5 | $N\cdot m$ |
| T_{stg} | Storage Temperature | | -40 | | 150 | $^\circ C$ |
| T_j | Operating Temperature | | -40 | | 150 | $^\circ C$ |
| W_t | Weight | | | 120 | | g |
| Outline | M01G | | | | | |


Fig1. Forward characteristics

Fig2. Power dissipation

Fig3. Transient thermal impedance

Fig4. Max non-repetitive forward surge current

Fig5. Forward current derating curve

(dimensions in mm)
S.C.O.M.E.S. Srl

Via Enrico Mattei, 6/8 - 26283 - Castiglione d'Adda (LO) - Italy
 Phone: +39 0377 901243 Fax: +39 0377 900206

Scomes Srl reserves the right to change any specification without notice