

MRT820.16-416F3

Thyristors module


Features:

- Pressure contact technology with increased power cycling capability
- Glass passivated chip
- Simple mounting



Typical applications:

- Power converters
- Lighting control
- DC motor control and drives
- Heat and temperature control

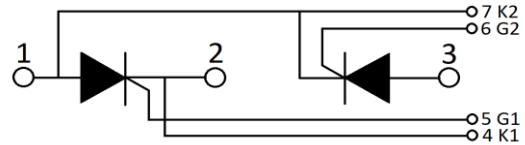

Symbol	Characteristics	Test Conditions	Value			Unit
			Min	Typ	Max	
$V_{RSM/DSM}$	Non-repetitive reverse/forward blocking voltage	$T_j = 25^\circ\text{C}$			1700	V
$V_{RRM/DRM}$	Repetitive reverse/forward blocking voltage	$T_j = 25^\circ\text{C}$			1600	V
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz			820	A
$I_{T(RMS)}$	RMS on-state current	$T_c = 85^\circ\text{C}$			1287	A
I_{RRM} I_{DRM}	Repetitive peak current	at V_{DRM}/V_{RRM} $T_j = 135^\circ\text{C}$			120	mA
I_{TSM}	Surge non repetitive current	10ms half sine wave $V_R = 60\% V_{RRM}$ $T_j = 135^\circ\text{C}$			20.1	kA
$I^2 t$	$I^2 t$ for fusing coordination				2020	kA^2s
V_{TO}	Threshold voltage	$T_j = 135^\circ\text{C}$			0.81	V
r_T	On-state slope resistance	$T_j = 135^\circ\text{C}$			0.24	$\text{m}\Omega$
V_{TM}	Peak on-state voltage	$T = 25^\circ\text{C}; I_T = 1500\text{A}$			1.38	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM} = 67\% V_{DRM}$, $T_j = 135^\circ\text{C}$, linear voltage rise			1000	$\text{V}/\mu\text{s}$
di/dt	Critical rate of rise of off-state current	$T_j = 135^\circ\text{C}$, Gate source 1,5A, $I_{TM} = 500\text{A}$, $T_r < 0,5\mu\text{s}$ Repetitive			200	$\text{A}/\mu\text{s}$
I_{GT}	Gate trigger current	$V_A = 12\text{V}$, $I_A = 1\text{A}$, $T_j = 25^\circ\text{C}$	30		250	mA
V_{GT}	Gate trigger voltage		0.8		3.0	V
I_H	Holding current		10		300	mA
V_{GD}	Non-trigger gate voltage	$V_{DM} = 67\% V_{DRM}$, $T_j = 135^\circ\text{C}$			0.25	V
$R_{th(j-c)}$	Thermal resistance junction to case	Single side cooled per chip			0.047	$^\circ\text{C}/\text{W}$
$R_{th(c-s)}$	Thermal resistance case to sink	Single side cooled per chip			0.015	$^\circ\text{C}/\text{W}$
V_{ISO}	Isolation voltage	50Hz, RMS, $t = 1\text{min}$, $I_{ISO} : 1\text{mA (MAX)}$	3000			V
F_M	Mounting torque - copper plate (M6)		4.5		6.0	N·m
	Mounting torque - terminal (M10)		10.0		12.0	N·m
T_{stg}	Storage Temperature		-40		135	$^\circ\text{C}$
T_j	Operating Temperature		-40		135	$^\circ\text{C}$
W_t	Weight			1410		g
Outline	416F3					

MRT820.16-416F3

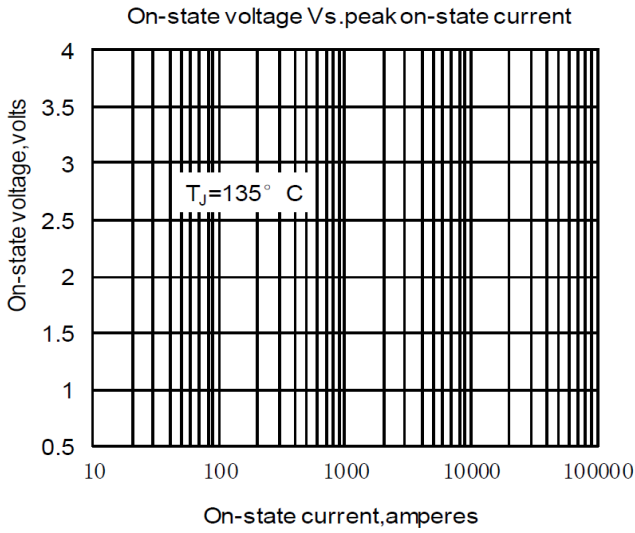


Fig1

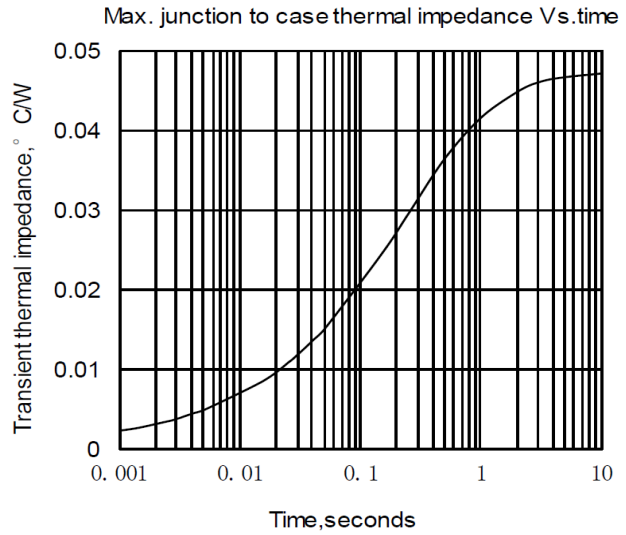


Fig2

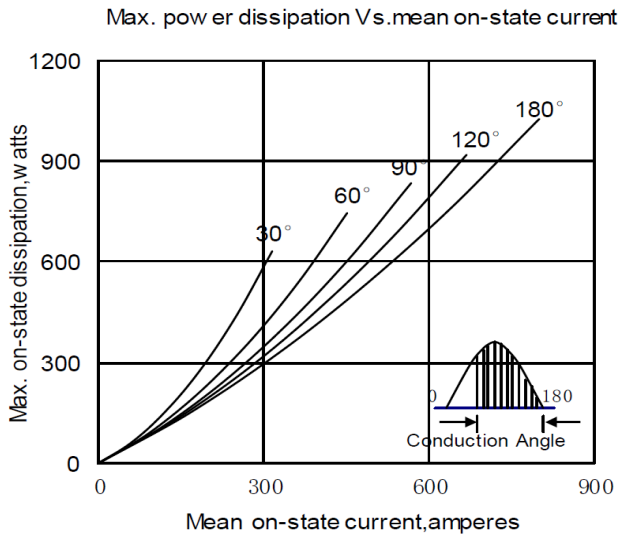


Fig3

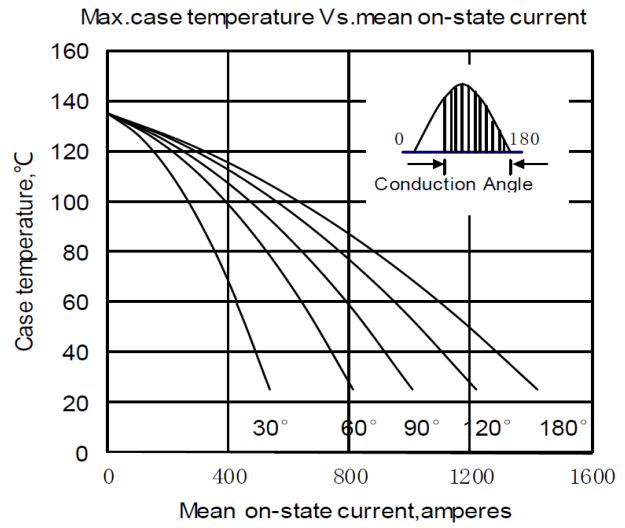


Fig4

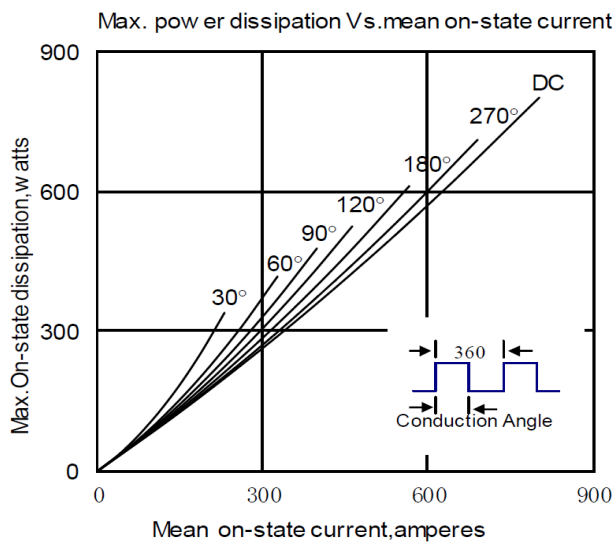


Fig5

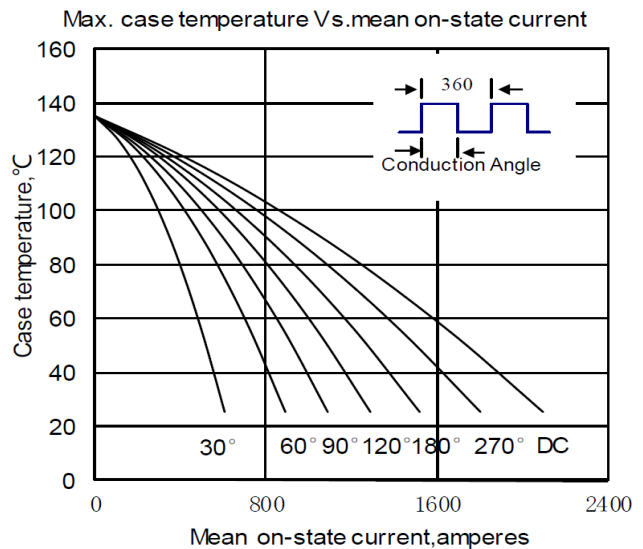


Fig6

MRT820.16-416F3

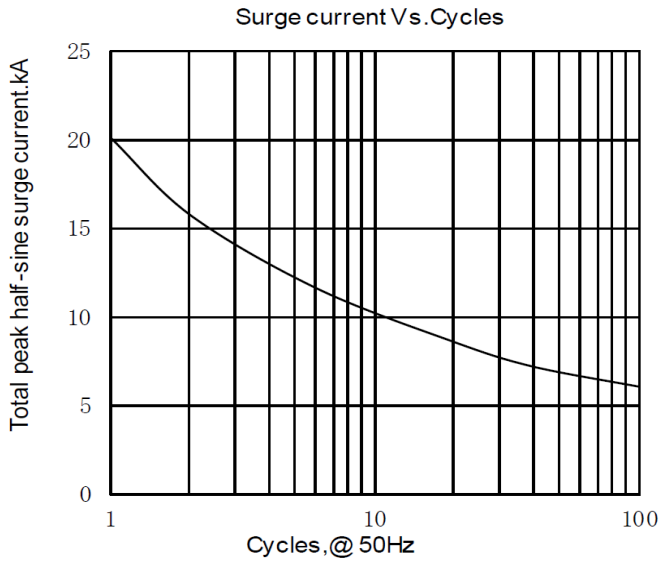


Fig7

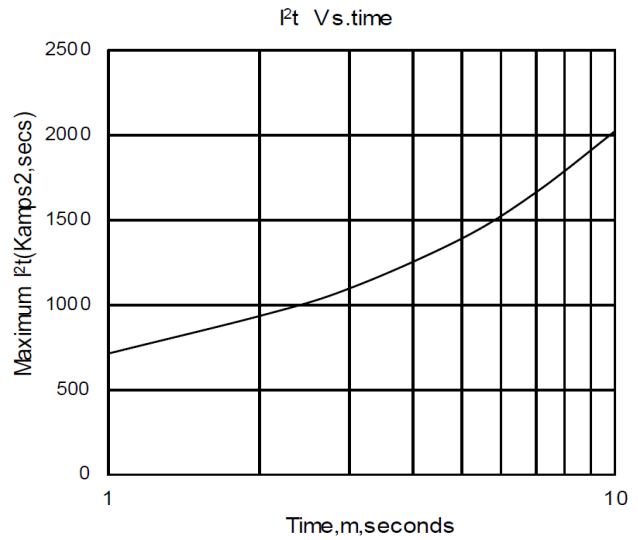


Fig8

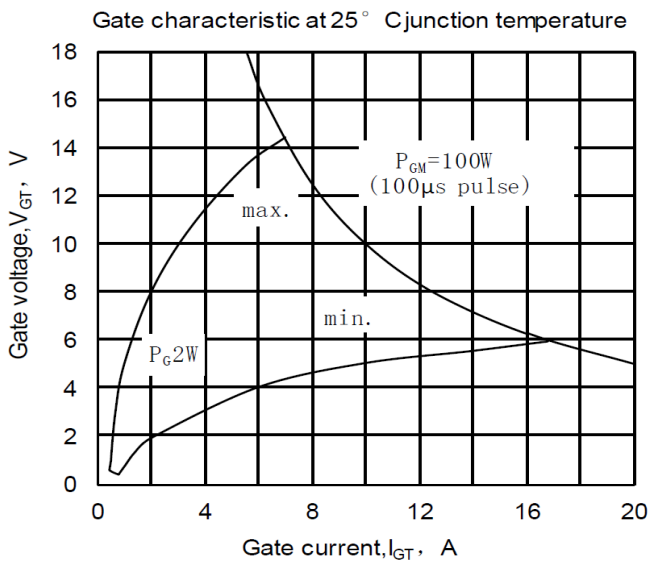


Fig9



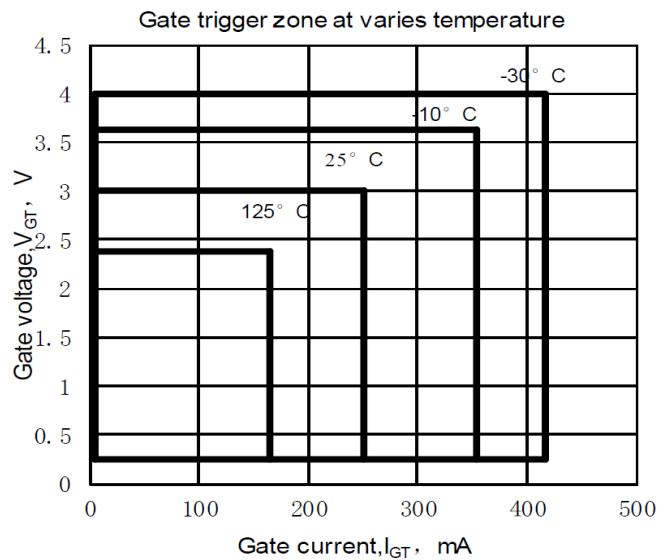


Fig10

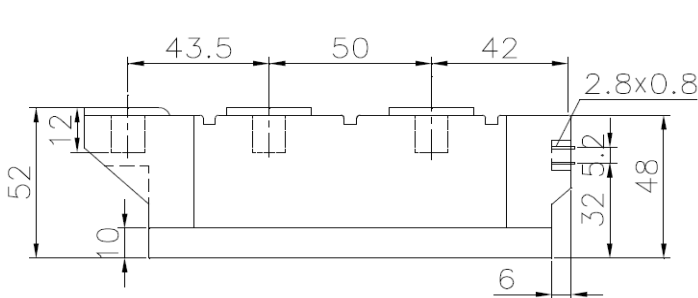

(dimensions in mm)

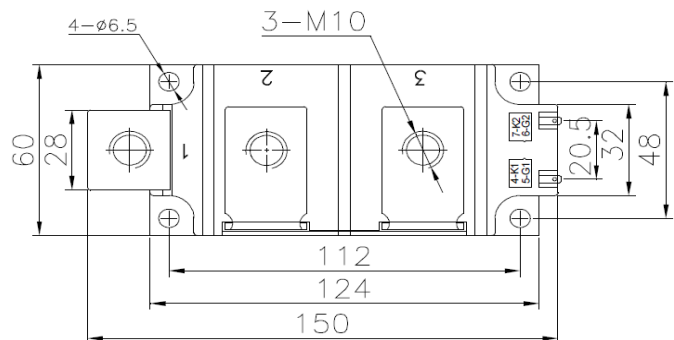

S.CO.M.E.S. Srl

Via Enrico Mattei, 6/8 - 26283 - Castiglione d'Adda (LO) - Italy

Phone: +39 0377 901243 Fax: +39 0377 900206