



SCT3290

Power Rectifier Thyristor

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$	2840 A
V_{DRM}/V_{RRM}	4300-5200V
I_{TSM}	34 kA
I^2t	5780 10³A²S

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _J (°C)	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled,	T _C =55°C			3290	A
			T _C =70°C			2840	
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$V_{DM}&V_{RRM}$ tp=10ms $V_{DSM}&V_{RSM} = V_{DRM}&V_{RRM}+100V$	125	4300		5200	V
I_{DRM} I_{RRM}	Repetitive peak current	$V_{DM} = V_{DRM}$ $V_{RM} = V_{RRM}$	125			250	mA
I_{TSM}	Surge on-state current	10ms half sine wave	125			34	kA
I^2t	I^2T for fusing coordination	$V_R = 0.6V_{RRM}$				5780	A ² s*10 ³
V_{TO}	Threshold voltage		125			1.09	V
r_T	On-state slop resistance					0.24	mΩ
V_{TM}	Peak on-state voltage	$I_{TM}=3000A, F=70kN$	125			1.71	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			1000	V/μs
di/dt	Critical rate of rise of on-state voltage current	$V_{DM} = 67\%V_{DRM}$ to 4000A, Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$	125			250	A/μs
Q_{rr}	Recovery charge	$I_{TM}=2000A, tp=2000\mu s, di/dt=-20A/\mu s,$ $V_R = 50V$	125		3500		μC
I_{GT}	Gate trigger current	$V_A=12V, I_A=1A$	25	40		300	mA
V_{GT}	Gate trigger voltage			0.8		3.0	V
I_H	Holding current			20		300	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	0.3			V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine' double side cooled Clamping force 70.0kN				0.007	°C/W
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.002	
F_m	Mounting force			63		84	kN
T_{stg}	Stored temperature			-40		140	°C
W_t	Weight				1390		g

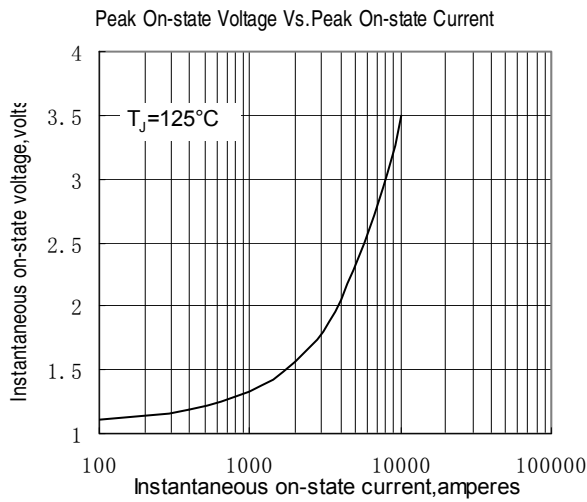


Fig.1

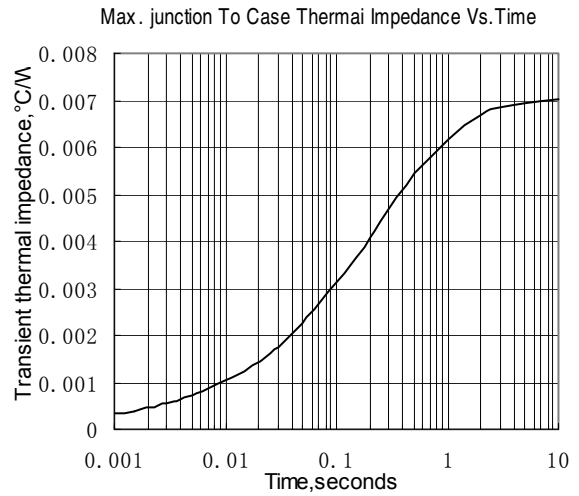


Fig.2

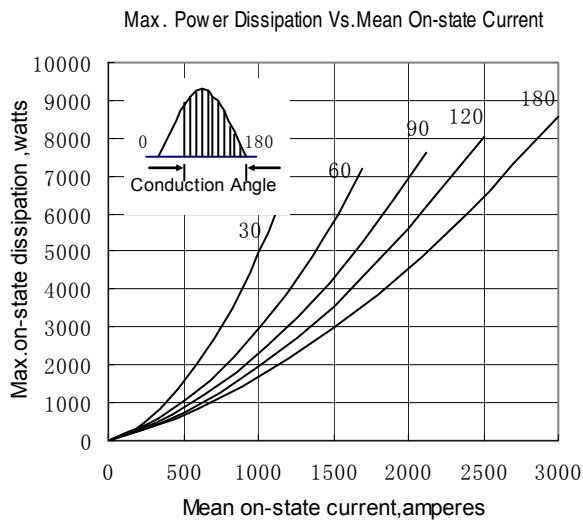


Fig.3

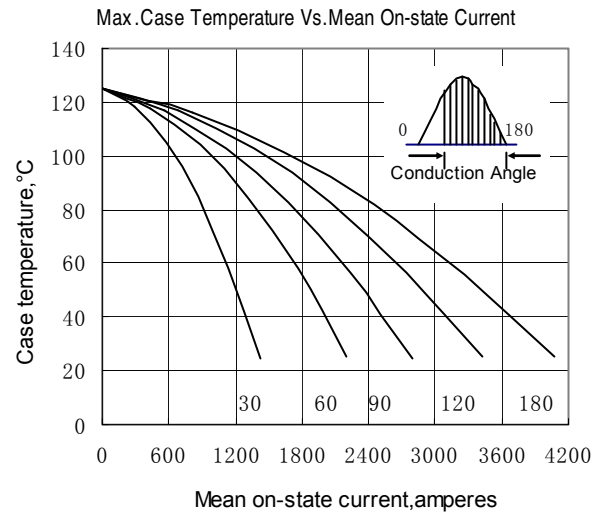


Fig.4

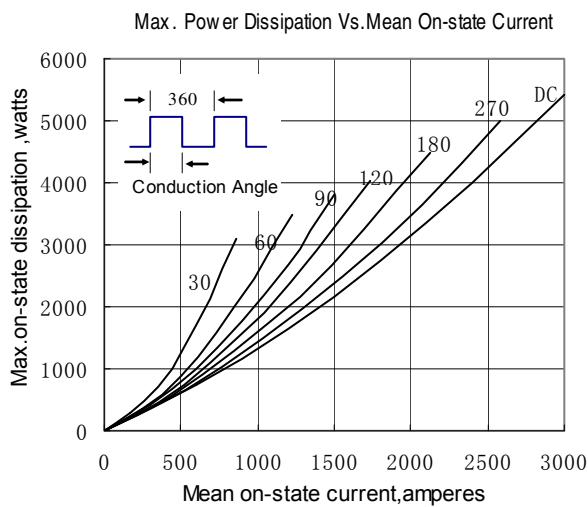


Fig.5

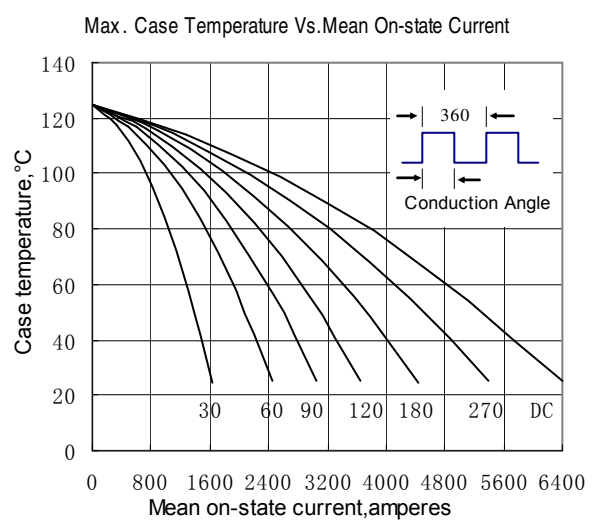


Fig.6

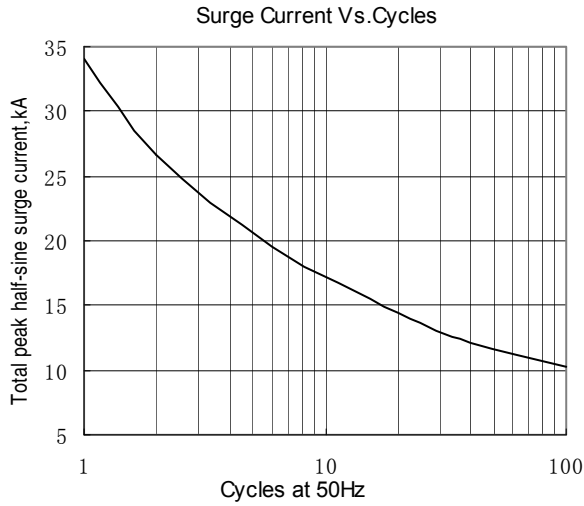


Fig.7

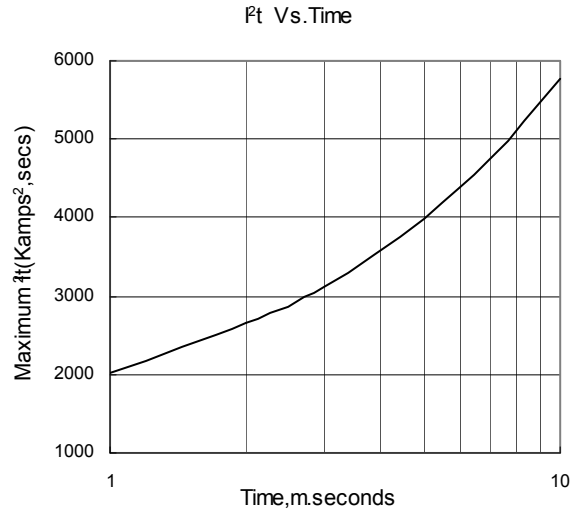


Fig.8

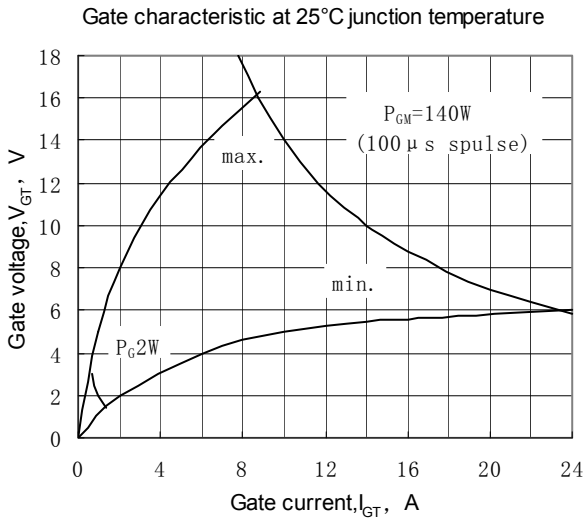


Fig.9


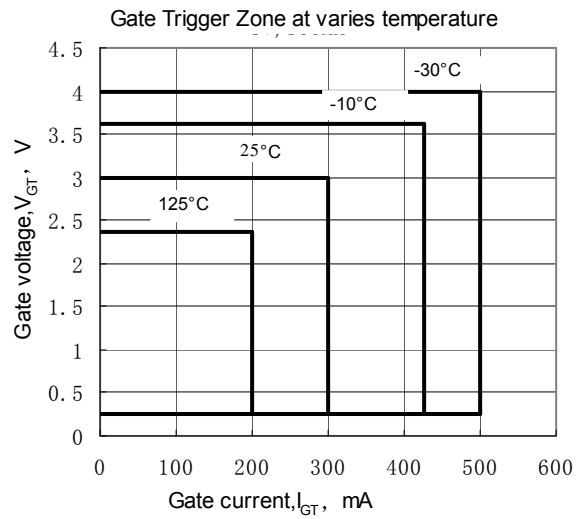


Fig.10

Outline:

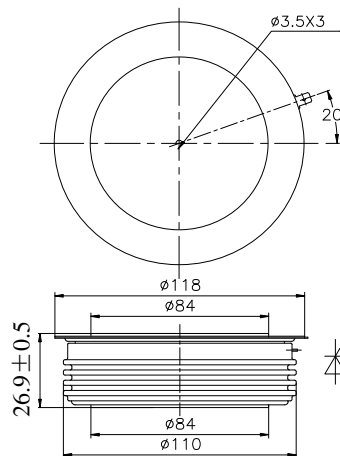

Scomes srl reserves the right to change any specification without notice

issue.may-2023