



SCT4230

Power Rectifier Thyristor

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$	3650 A
V_{DRM}/V_{RRM}	4300-5200V
I_{TSM}	45 kA
I^2t	10125 10³A²S

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled,	125			4230	A
		$T_c=55^{\circ}C$ $T_c=70^{\circ}C$				3650	
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	V_{DRM} & V_{RRM} tp=10ms V_{DSM} & $V_{RSM}= V_{DRM}$ & V_{RRM} +100V	125	4300		5200	V
I_{DRM} I_{RRM}	Repetitive peak current	$V_{DM}= V_{DRM}$ $V_{RM}= V_{RRM}$	125			250	mA
I_{TSM}	Surge on-state current	10ms half sine wave	125			45	kA
I^2t	I^2T for fusing coordination	$V_R=0.6V_{RRM}$				10125	A ² s*10 ³
V_{TO}	Threshold voltage		125			1.13	V
r_T	On-state slop resistance					0.21	mΩ
V_{TM}	Peak on-state voltage	$I_{TM}=3000A, F=90kN$	125			1.64	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			1000	V/μs
di/dt	Critical rate of rise of on-state current	$V_{DM}= 67\%V_{DRM}$ to 4000A, Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$	125			250	A/μs
Q_{rr}	Recovery charge	$I_{TM}=2000A, tp=2000\mu s, di/dt=-20A/\mu s,$ $V_R =50V$	125		4000		μC
I_{GT}	Gate trigger current	$V_A=12V, I_A=1A$	25	50		300	mA
V_{GT}	Gate trigger voltage			0.8		3.0	V
I_H	Holding current			20		1000	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	0.3			V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 90kN				0.005	°C /W
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.0015	
F_m	Mounting force			81		108	kN
T_{stg}	Stored temperature			-40		140	°C
W_t	Weight				2000		g

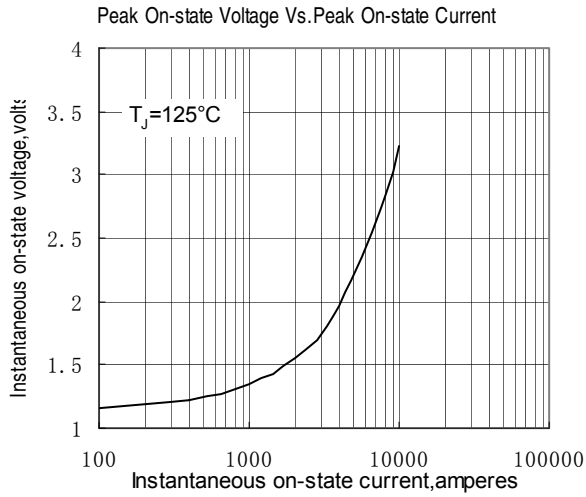


Fig.1

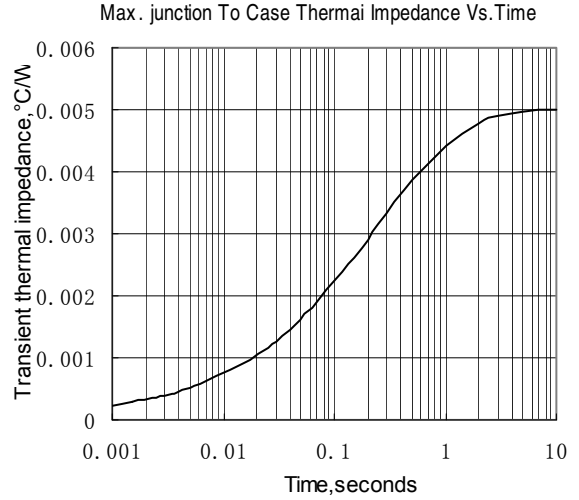


Fig.2

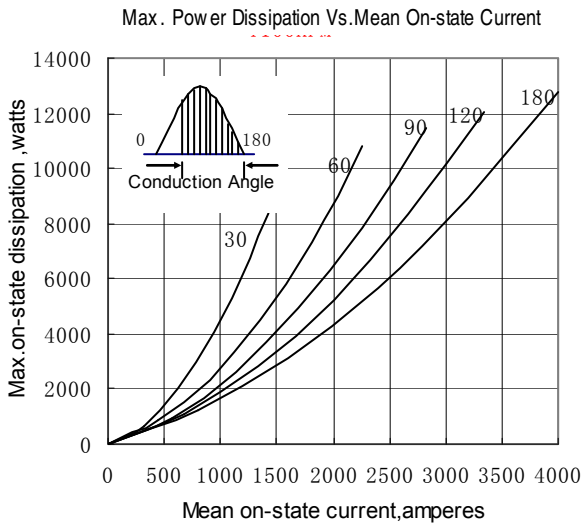


Fig.3

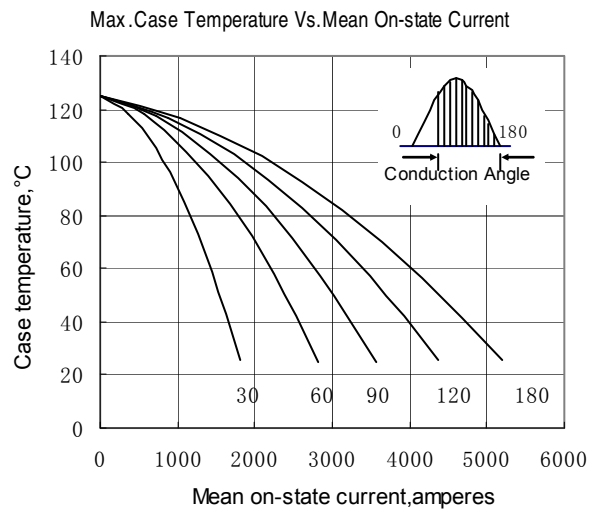


Fig.4

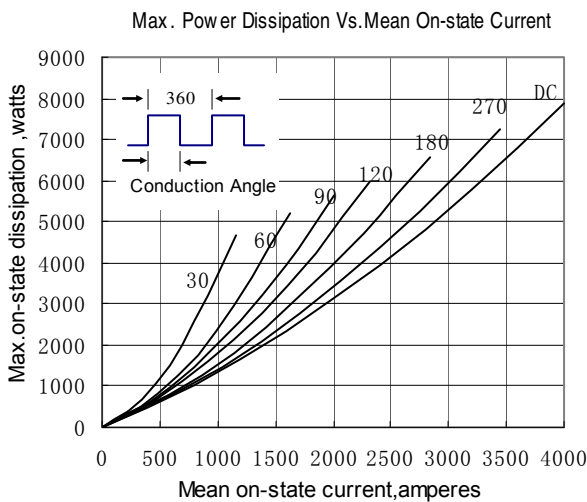


Fig.5

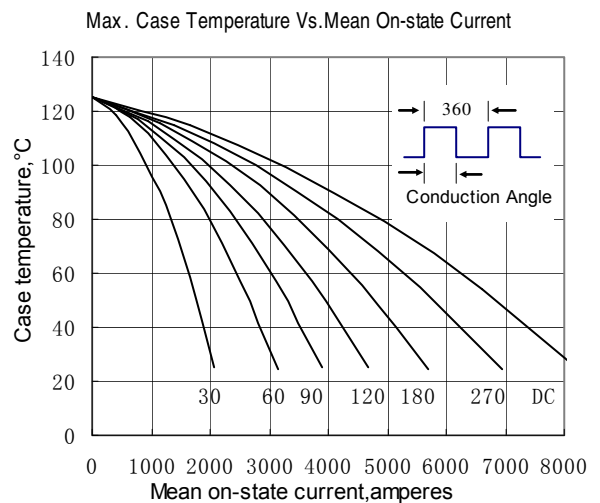


Fig.6

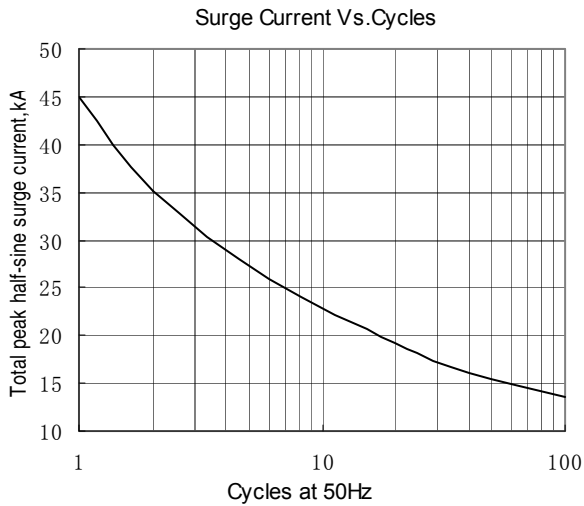


Fig.7

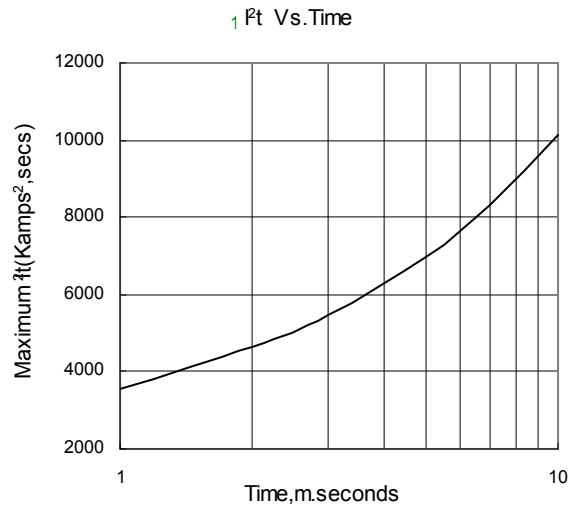


Fig.8

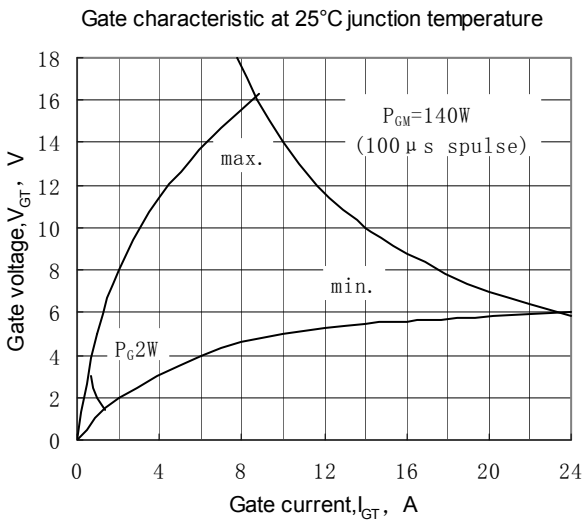


Fig.9


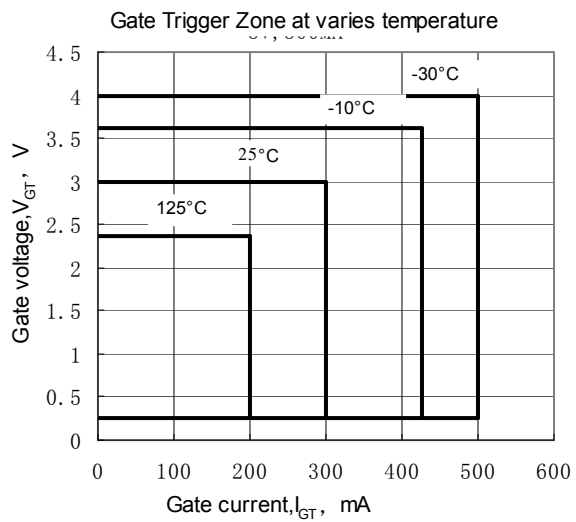


Fig.10

Outline:

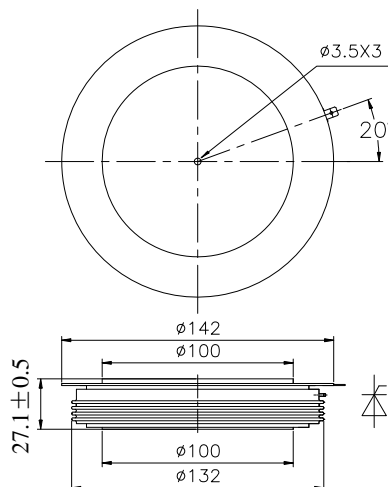

Scomes srl reserves the right to change any specification without notice

issue.may-2023