

SCT700F



Fast Switching Thyristor


Features:

- Interdigitated amplifying gates
- Fast turn-on and high di/dt
- Low switching losses
- Short turn-off time
- Hermetic metal cases with ceramic insulators

Typical Applications

- Inductive heating
- Electronic welders
- Self-commutated inverters
- AC motor speed control
- General power switching applications

$I_{T(AV)}$ **700A**
 V_{DRM}/V_{RRM} **800~1200V**
 t_q **8~20μs**
 I_{TSM} **8.9kA**

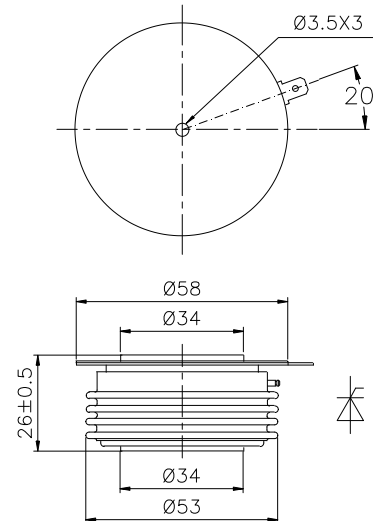

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _j (°C)	VALUE			UNIT
				Min	Type	Max	
I _{T(AV)}	Mean on-state current	180° half sine wave 50Hz Double side cooled, T _c =55°C	125			700	A
V _{DRM} V _{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms	125	800		1200	V
I _{DRM} I _{RRM}	Repetitive peak off-state current Repetitive peak reverse current	at V _{DRM} at V _{RRM}	125			40	mA
I _{TSM}	Surge on-state current	10ms half sine wave	125			8.9	kA
I ² t	I ² t for fusing coordination	V _R =0.6V _{RRM}				396	A ² s*10 ³
V _{TO}	Threshold voltage		125			1.68	V
r _T	On-state slope resistance					0.67	mΩ
V _{TM}	Peak on-state voltage	I _{TM} =1200A, F=15kN	25			3.20	V
dv/dt	Critical rate of rise of off-state voltage	V _{DM} =0.67V _{DRM}	125			1000	V/μs
di/dt	Critical rate of rise of on-state current	V _{DM} = 67%V _{DRM} , to 1400A Gate pulse t _g ≤0.5μs I _{GM} =1.5A	125			1500	A/μs
Q _{rr}	Recovery charge	I _{TM} =1000A, tp=2000μs, di/dt=-60A/μs, V _R =50V	125		33	50	μC
t _q	Circuit commutated turn-off time	I _{TM} =700A, tp=1000μs, V _R =50V dv/dt=30V/μs, di/dt=-20A/μs	125	8		20	μs
I _{GT}	Gate trigger current	V _A =12V, I _A =1A	25	30		250	mA
V _{GT}	Gate trigger voltage			0.8		3.0	V
I _H	Holding current			20		400	mA
V _{GD}	Non-trigger gate voltage	V _{DM} =67%V _{DRM}	125	0.3			V
R _{th(j-c)}	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 15kN				0.035	°C/W
R _{th(c-h)}	Thermal resistance case to heat sink					0.008	
F _m	Mounting force			10		20	kN
T _{stg}	Stored temperature			-40		140	°C
W _t	Weight					250	g

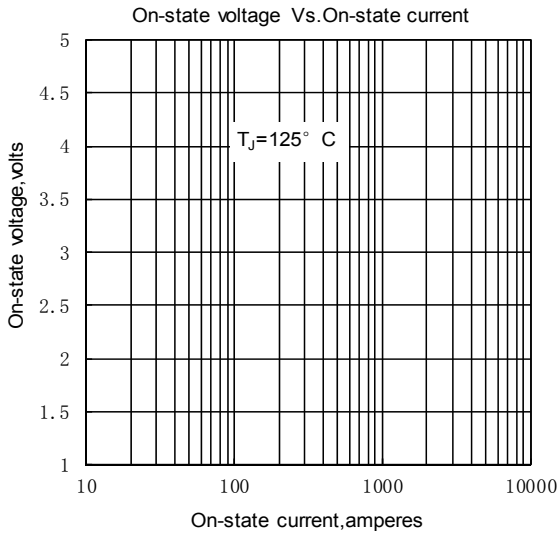


Fig. 1

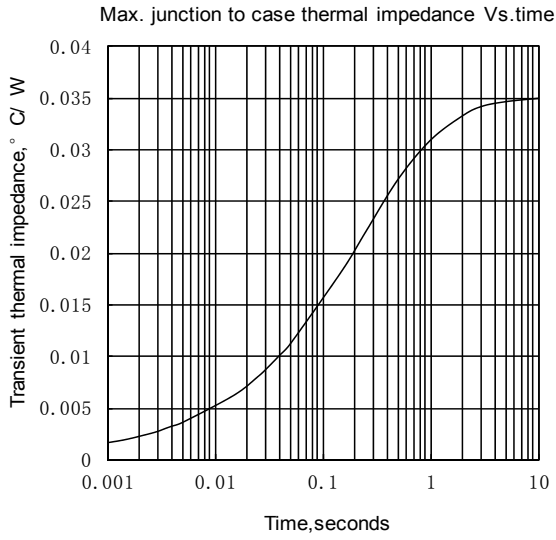


Fig. 2

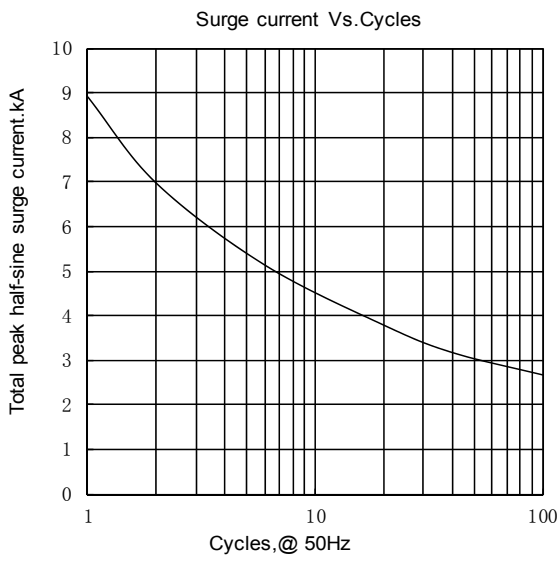


Fig. 3

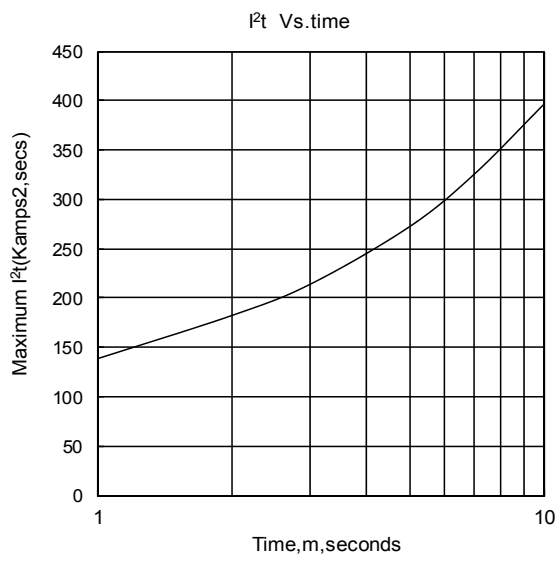


Fig. 4

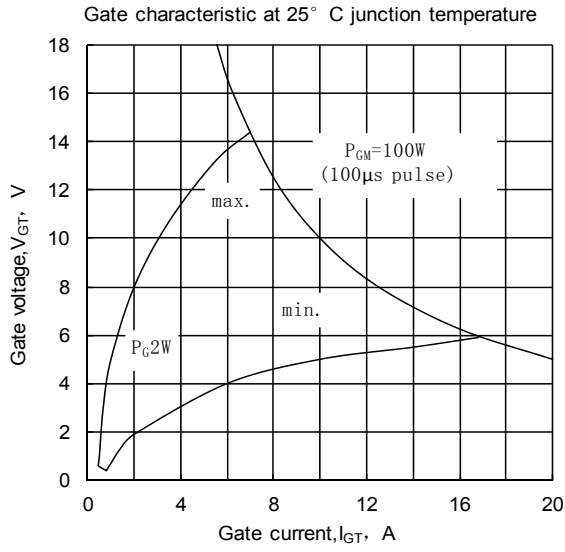


Fig. 5

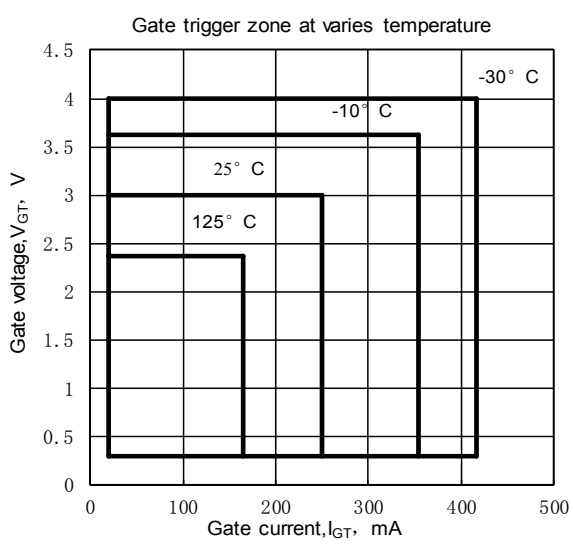


Fig. 6

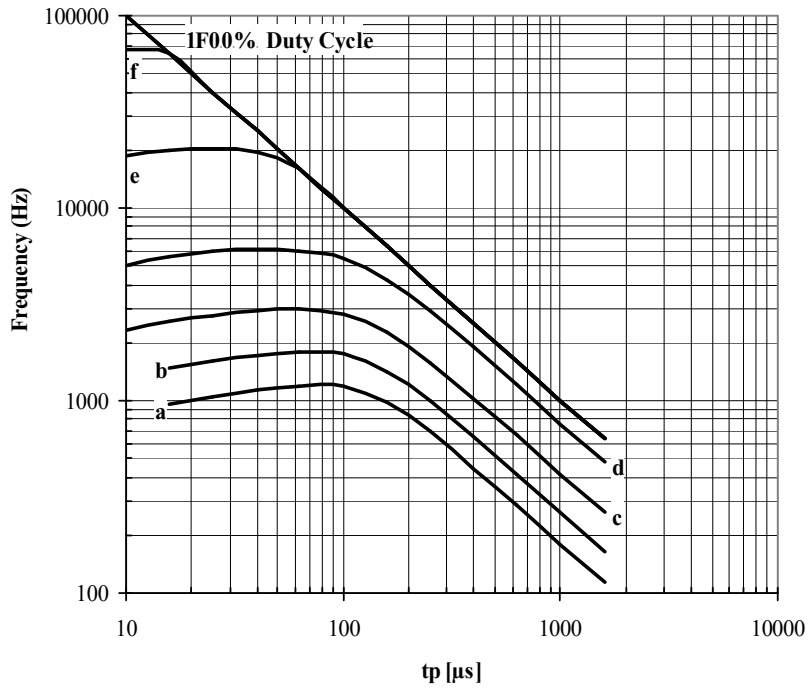


Fig. 7 Sine wave frequency ratings

- a - $I_{TM} = 5000\text{ A}$
- b - $I_{TM} = 4000\text{ A}$
- c - $I_{TM} = 3000\text{ A}$
- d - $I_{TM} = 2000\text{ A}$
- e - $I_{TM} = 1000\text{ A}$
- f - $I_{TM} = 500\text{ A}$

Conditions: $V_R=0V$; $T_C=55\text{ }^\circ\text{C}$

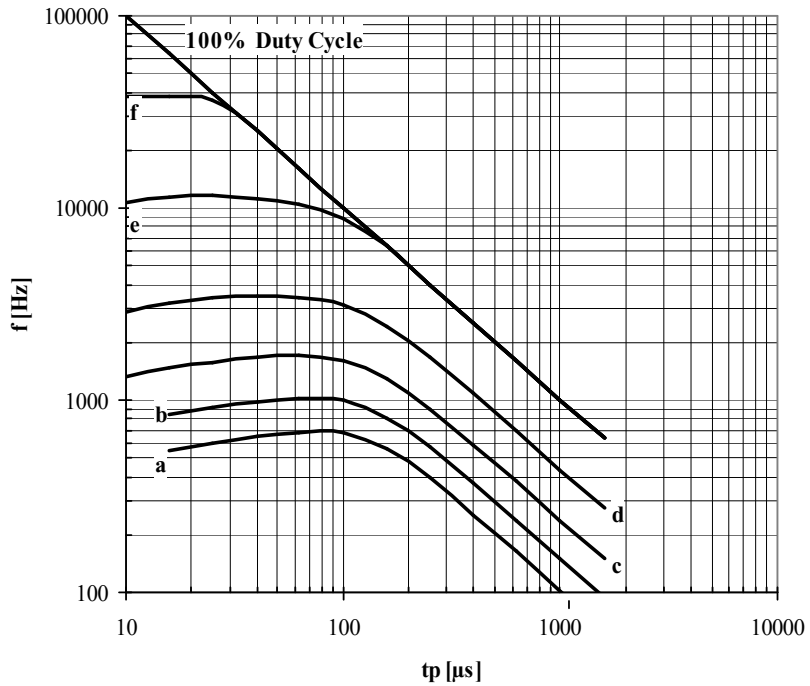


Fig. 8 Sine wave frequency ratings

- a - $I_{TM} = 5000\text{ A}$
- b - $I_{TM} = 4000\text{ A}$
- c - $I_{TM} = 3000\text{ A}$
- d - $I_{TM} = 2000\text{ A}$
- e - $I_{TM} = 1000\text{ A}$
- f - $I_{TM} = 500\text{ A}$
- g - $I_{TM} = 250\text{ A}$

Conditions: $V_R=0V$; $T_C=80\text{ }^\circ\text{C}$

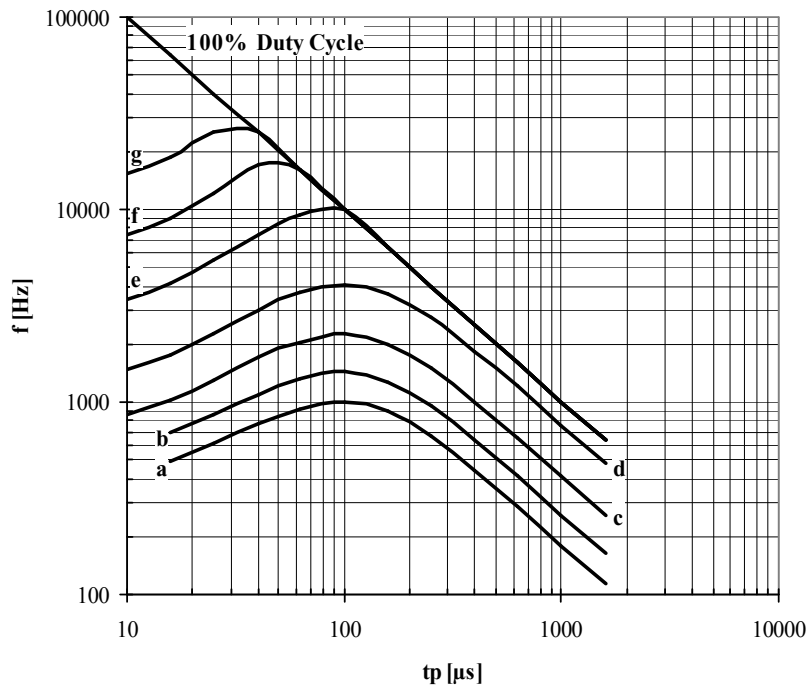


Fig. 9 Sine wave frequency ratings

- a - $I_{TM} = 5000$ A
- b - $I_{TM} = 4000$ A
- c - $I_{TM} = 3000$ A
- d - $I_{TM} = 2000$ A
- e - $I_{TM} = 1000$ A
- f - $I_{TM} = 500$ A
- g - $I_{TM} = 250$ A

Conditions: $V_R = 0.67 \cdot V_{RRM}$; $T_C = 55$ °C

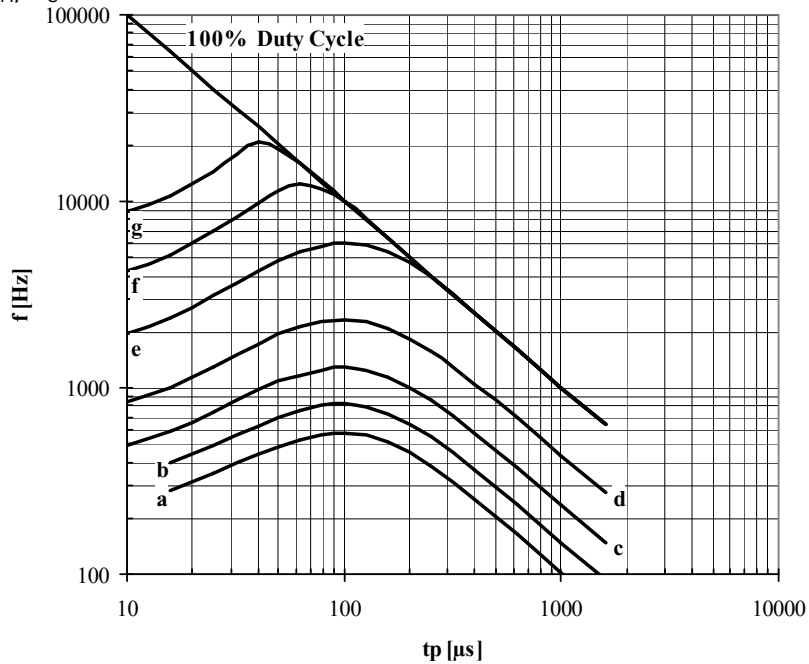


Fig. 10 Sine wave frequency ratings

- a - $I_{TM} = 5000$ A
- b - $I_{TM} = 4000$ A
- c - $I_{TM} = 3000$ A
- d - $I_{TM} = 2000$ A
- e - $I_{TM} = 1000$ A
- f - $I_{TM} = 500$ A
- g - $I_{TM} = 250$ A

Conditions: $V_R = 0.67 \cdot V_{RRM}$; $T_C = 80$ °C

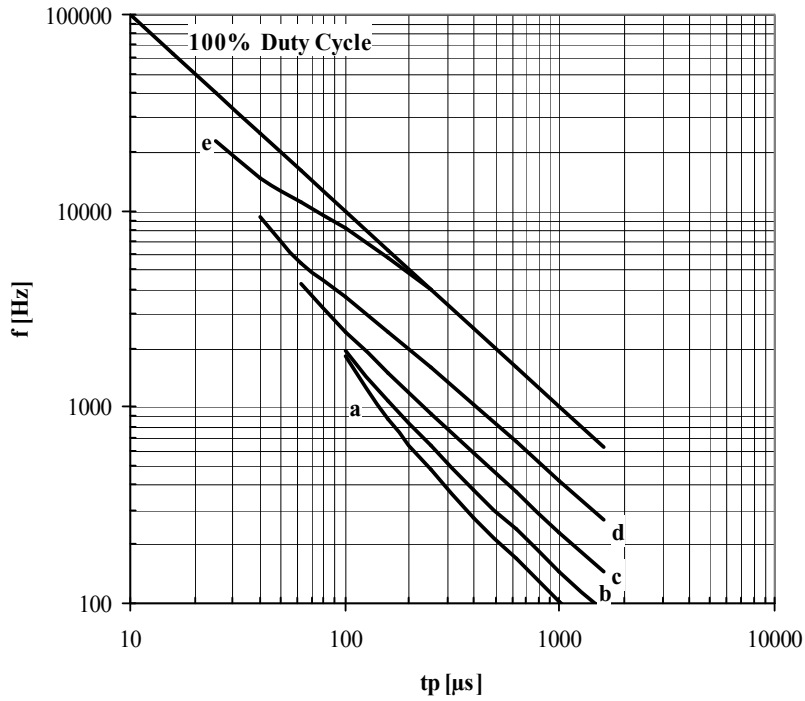


Fig. 11 Square wave frequency ratings

- a - $I_{TM} = 5000$ A
- b - $I_{TM} = 4000$ A
- c - $I_{TM} = 3000$ A
- d - $I_{TM} = 2000$ A
- e - $I_{TM} = 1000$ A

Conditions: $V_R=0V$; $T_C=55$ °C; $di/dt=100$ A/ μ s

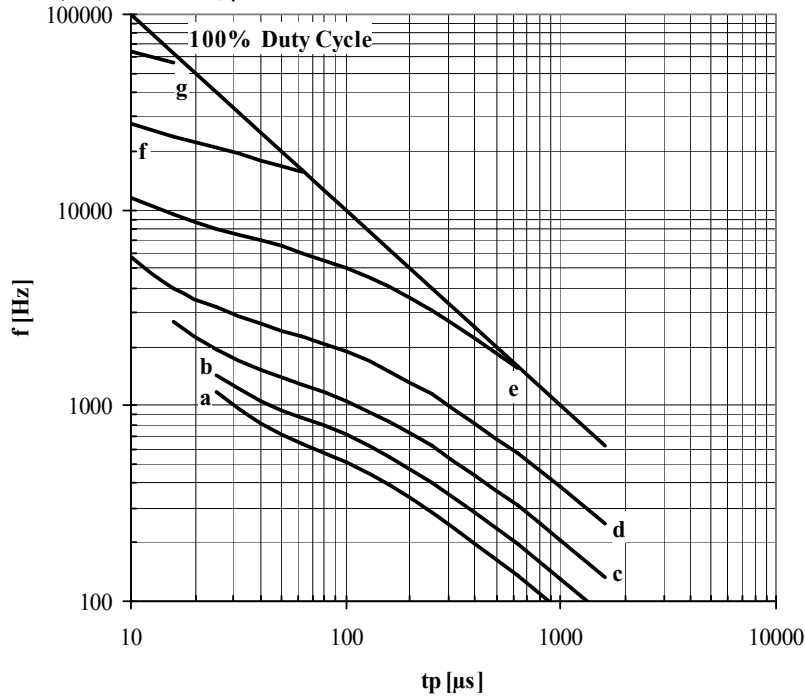


Fig. 12 Square wave frequency ratings

- a - $I_{TM} = 5000$ A
- b - $I_{TM} = 4000$ A
- c - $I_{TM} = 3000$ A
- d - $I_{TM} = 2000$ A
- e - $I_{TM} = 1000$ A
- f - $I_{TM} = 500$ A
- g - $I_{TM} = 250$ A

Conditions: $V_R=0V$; $T_C=55$ °C; $di/dt=500$ A/ μ s

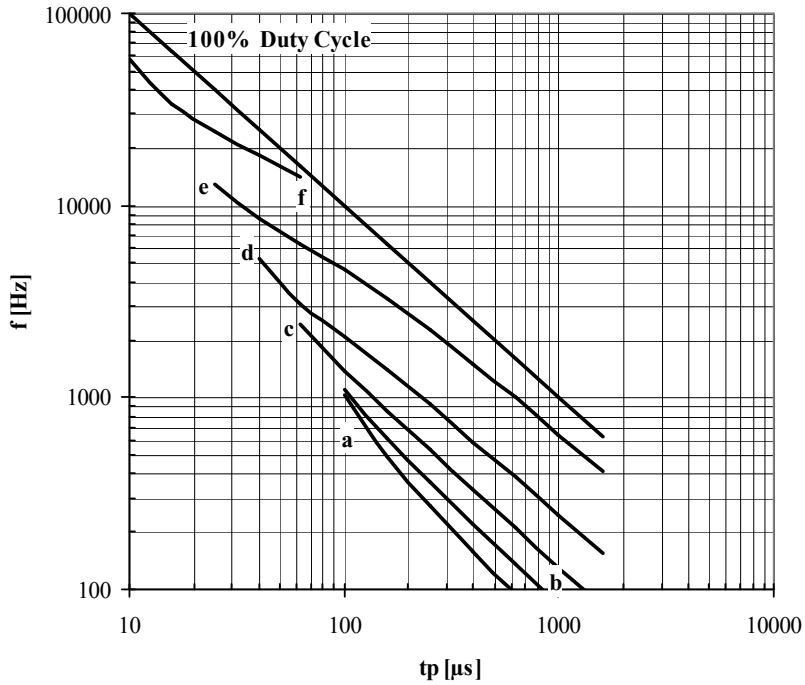


Fig. 13 Square wave frequency ratings

- a - $I_{TM} = 5000 \text{ A}$
- b - $I_{TM} = 4000 \text{ A}$
- c - $I_{TM} = 3000 \text{ A}$
- d - $I_{TM} = 2000 \text{ A}$
- e - $I_{TM} = 1000 \text{ A}$
- f - $I_{TM} = 500 \text{ A}$
- g - $I_{TM} = 250 \text{ A}$

Conditions: $V_R=0V$; $T_C=80 \text{ }^\circ\text{C}$; $di/dt=100 \text{ A}/\mu\text{s}$

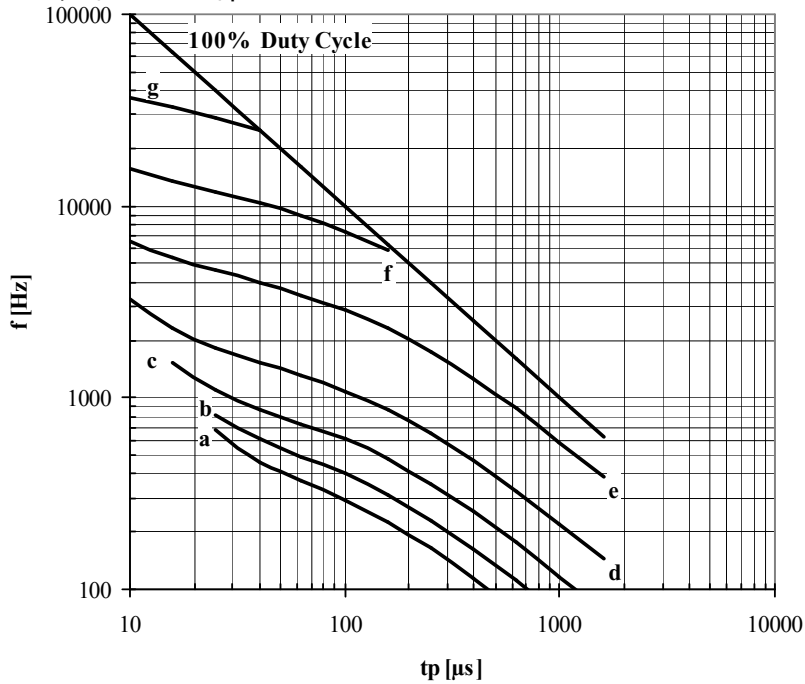


Fig. 14 Square wave frequency ratings

- a - $I_{TM} = 5000 \text{ A}$
- b - $I_{TM} = 4000 \text{ A}$
- c - $I_{TM} = 3000 \text{ A}$
- d - $I_{TM} = 2000 \text{ A}$
- e - $I_{TM} = 1000 \text{ A}$
- f - $I_{TM} = 500 \text{ A}$
- g - $I_{TM} = 250 \text{ A}$

Conditions: $V_R=0V$; $T_C=80 \text{ }^\circ\text{C}$; $di/dt=500 \text{ A}/\mu\text{s}$

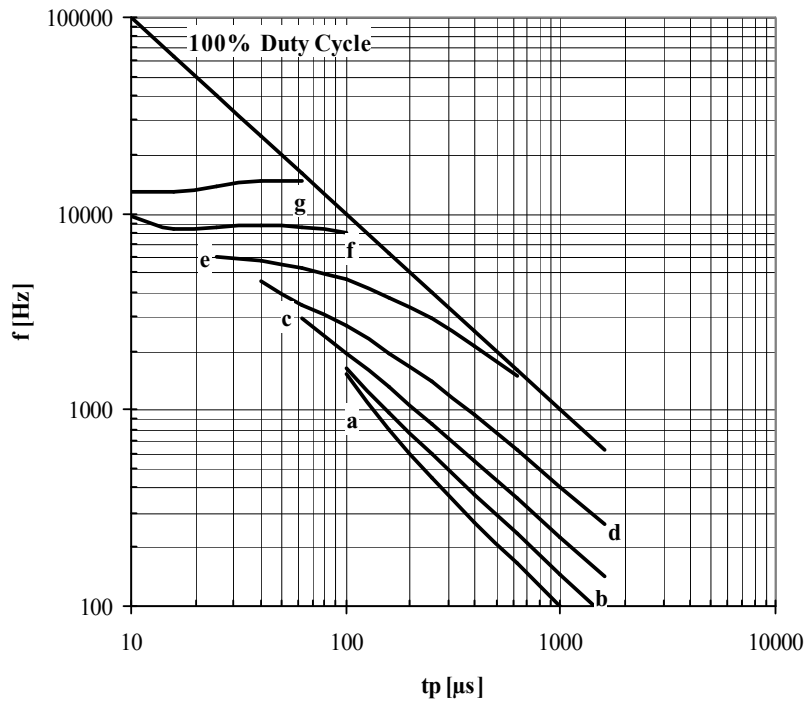


Fig. 15 Square wave frequency ratings

- a - $I_{TM} = 5000$ A
- b - $I_{TM} = 4000$ A
- c - $I_{TM} = 3000$ A
- d - $I_{TM} = 2000$ A
- e - $I_{TM} = 1000$ A
- f - $I_{TM} = 500$ A
- g - $I_{TM} = 250$ A

Conditions: $V_R = 0.67 \cdot V_{RRM}$; $T_C = 55$ °C; $di_F/dt = di_R/dt = 100$ A/ μ s

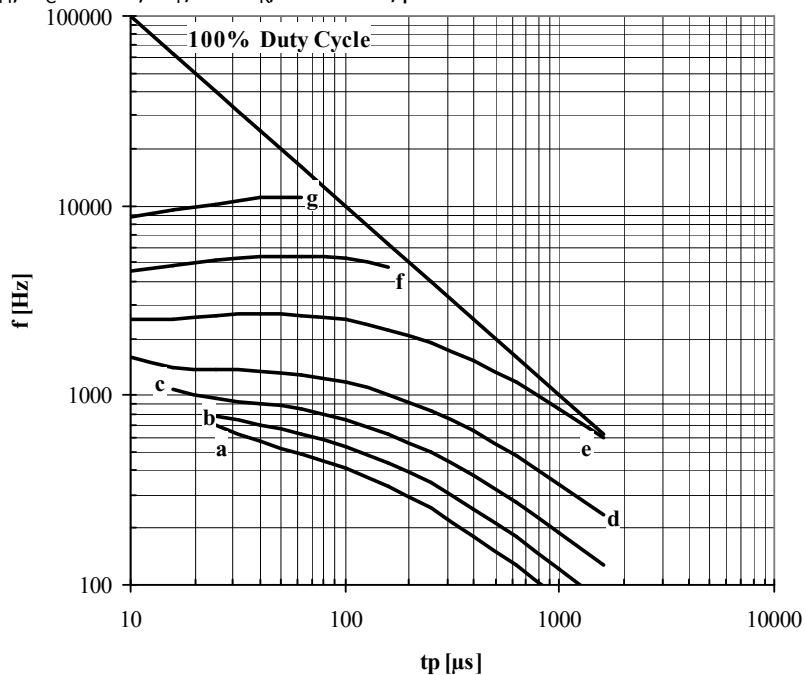
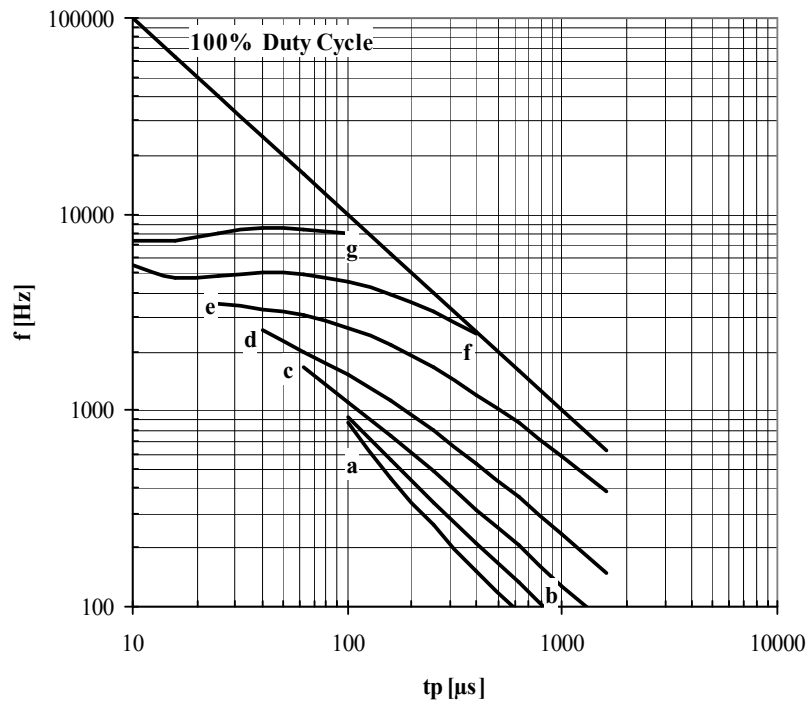


Fig. 16 Square wave frequency ratings


- a - $I_{TM} = 5000$ A
- b - $I_{TM} = 4000$ A
- c - $I_{TM} = 3000$ A
- d - $I_{TM} = 2000$ A
- e - $I_{TM} = 1000$ A
- f - $I_{TM} = 500$ A
- g - $I_{TM} = 250$ A

Conditions: $V_R = 0.67 \cdot V_{RRM}$; $T_C = 55$ °C; $di_F/dt = di_R/dt = 500$ A/ μ s


Fig. 17 Square wave frequency ratings

- a - $I_{TM} = 5000$ A
- b - $I_{TM} = 4000$ A
- c - $I_{TM} = 3000$ A
- d - $I_{TM} = 2000$ A
- e - $I_{TM} = 1000$ A
- f - $I_{TM} = 500$ A
- g - $I_{TM} = 250$ A

Conditions: $V_R = 0.67 \cdot V_{RRM}$; $T_C = 80$ °C; $di_F/dt = di_R/dt = 100$ A/μs

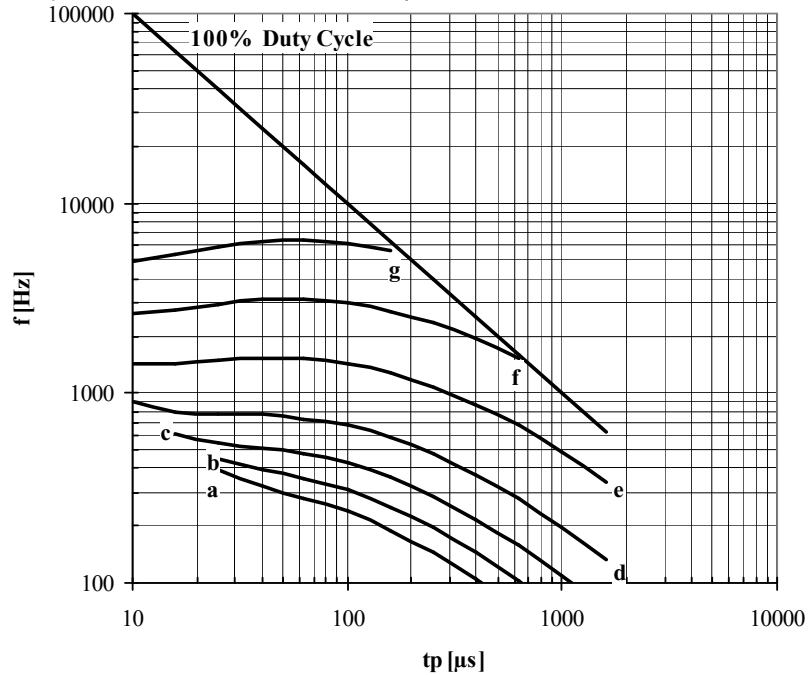
Fig. 18 Square wave frequency ratings

- a - $I_{TM} = 5000$ A
- b - $I_{TM} = 4000$ A
- c - $I_{TM} = 3000$ A
- d - $I_{TM} = 2000$ A
- e - $I_{TM} = 1000$ A
- f - $I_{TM} = 500$ A
- g - $I_{TM} = 250$ A

Conditions: $V_R = 0.67 \cdot V_{RRM}$; $T_C = 80$ °C; $di_F/dt = di_R/dt = 500$ A/μs